NP131004VFA1C

13x10x4 Polycarbonate + ABS Weatherproof Enclosure with Equipment Mounting Plate, Cooling Fan, 120VAC Outlet & Power Cord

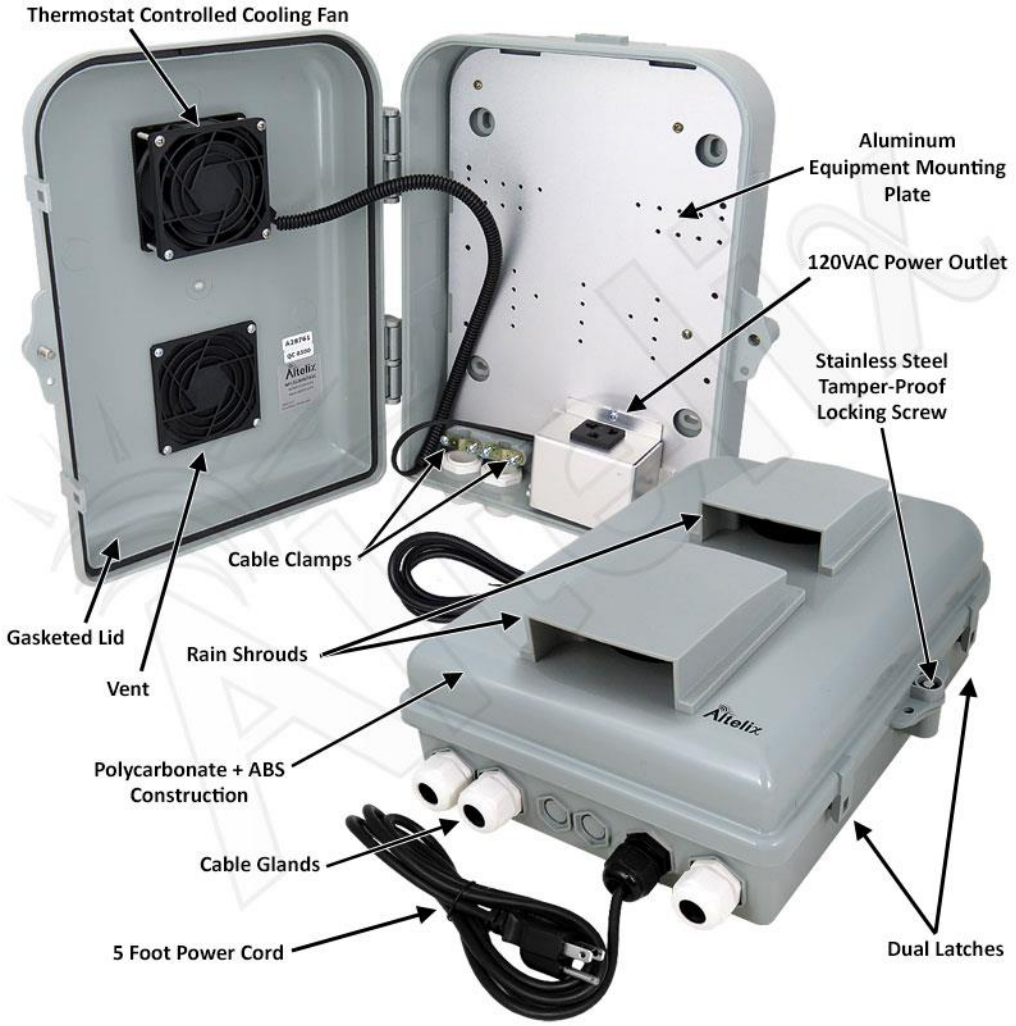

Features

- (2) 3" Vents with Rain Shields and a Thermostat Controlled Cooling Fan
- Features a 1.5mm Thick Finished Aluminum Equipment Mounting Plate with 120VAC Power Outlet
- Pre-wired 5 Foot Power Cord
- Meets NEMA 3R, 3RX and IP24
- Weatherproof and UV Stable Durable Polycarbonate + ABS
- RF Transparent for Wireless Devices
- Gasketed Lid with Dual Latches
- Tamper-Proof Locking Screw with Key and Provision for Padlock
- Includes Wall Mounting Hardware, Cable Glands, Zip Ties, Cable Management Straps
- Optional Pole Mount Kit Available

Altelix LLC USA: 866-660-9434 +1 561-660-9434 sales@altelix.com www.altelix.com
Copyright (C) 2023 Altelix LLC. All rights reserved. Altelix and the Altelix logo are Trademarks and/or Registered Trademarks of Altelix LLC.
Specifications are subject to change without notice. See www.altelix.com for most current information.

Description

The **Altelix NP131004VFA1C** NEMA enclosure is simple to install because no wiring is required. Simply mount the enclosure and plug the pre-wired 5 foot power cord into a nearby outlet. The finished aluminum equipment mounting plate features a pre-wired 120VAC power outlet for your equipment.

Polycarbonate + ABS Protection Built to Last - This enclosure is molded out of UV resistant Polycarbonate + ABS, an industrial grade plastic with greater strength and durability than standard ABS. It features a gasketed hinged door with dual latches, a stainless steel security screw and provision for a padlock.

Fan Cooling with Thermostat Control - This enclosure features two 3" vents and a thermostat-controlled cooling fan which helps maintain lower internal temperatures. Rain shrouds keep rainwater from entering the enclosure while allowing ventilation for installed equipment. The fan is wired internally, leaving the power outlet available for installed equipment.

Complete with Cable Glands and Wire Management Accessories - This enclosure includes 3 weatherproof cable glands. Simply punch out the seal, run your cable, and hand tighten for a water-tight seal. For convenience, the included accessory kit contains wall anchors, zip ties, hook-and-loop wire management straps, door locking key and more.

Specifications

Material	Polycarbonate + ABS
Color	Gray
Voltage / Max Load	120VAC / 10A @ 120VAC
Cooling Fan Turn-On Temperature	100°F (38°C) ±9°F
Cooling Fan Turn-Off Temperature	79°F (26°C) ±9°F
Outer Dimensions (Height x Width x Depth)	13.7 x 10.8 x 5.4 Inches (348 x 274 x 136 mm)
Inner Dimensions* (Height x Width x Depth)	7.0 x 7.8 x 2.3 Inches (178 x 197 x 57 mm)
Mounting Plate Material	0.06 in. (1.5mm) Aluminum
Weight	3.5 lbs. (1.6 kg)
Power Cord Length	5 Feet (1.5m)
Ratings	Meets or Exceeds NEMA 3R, 3RX and IP24
Flame Rating	Meets UL94-V0
Included Cable Glands	(3) M24 x 1.5

*Interior dimensions represent maximum space available for equipment. See drawing for additional details.

Altelix LLC USA: 866-660-9434 +1 561-660-9434 sales@altelix.com www.altelix.com
Copyright (C) 2023 Altelix LLC. All rights reserved. Altelix and the Altelix logo are Trademarks and/or Registered Trademarks of Altelix LLC.
Specifications are subject to change without notice. See www.altelix.com for most current information.