

Technical Data

Model	Apollo SL	Apollo SLX
Output	40,000 Lumens / 25,000 Sq Ft.	
Weight	75 Lbs. + 32 Lbs. Case	85 Lbs. + 32 Lbs. Case
Mast	5-20' Carbon Fiber Composite Mast	
Energy	Single integrated battery (758Wh)	Dual integrated batteries (1516Wh)
Power	66 – 200W Dimmable High Efficiency LEDs	
Case	Peli-Style Shockproof Case	
Setting	4-hr High, 12-hr Low	8-hr High, 24-hr Low
LEDs	5500k, 70 CRI, 200lm/w efficiency, 60deg Beam	

Quick Guide

- 1. Position:** Place the eTower on a level surface in the desired location.
- 2. Stabilize:** Quickly extend and secure the stabilizing legs to anchor the tower.
- 3. Adjust Lights:** Aim the LED lights toward the area that needs illumination.
- 4. Raise Mast:** Unlock and elevate the mast to its full height, securing it in place.
- 5. Power On:** Activate the eTower using the power switch.

Efficient

200lm/w ultra efficient LED chips. Optical lens' for maximum useable light.


Quick

Deploy in 60 Seconds!

Economic

Save Thousands in Annual Savings vs Conventional Light Tower*

- ✓ 24hrs of Light
- ✓ Compact storage
- ✓ <60s Deployment
- ✓ Single Man Setup

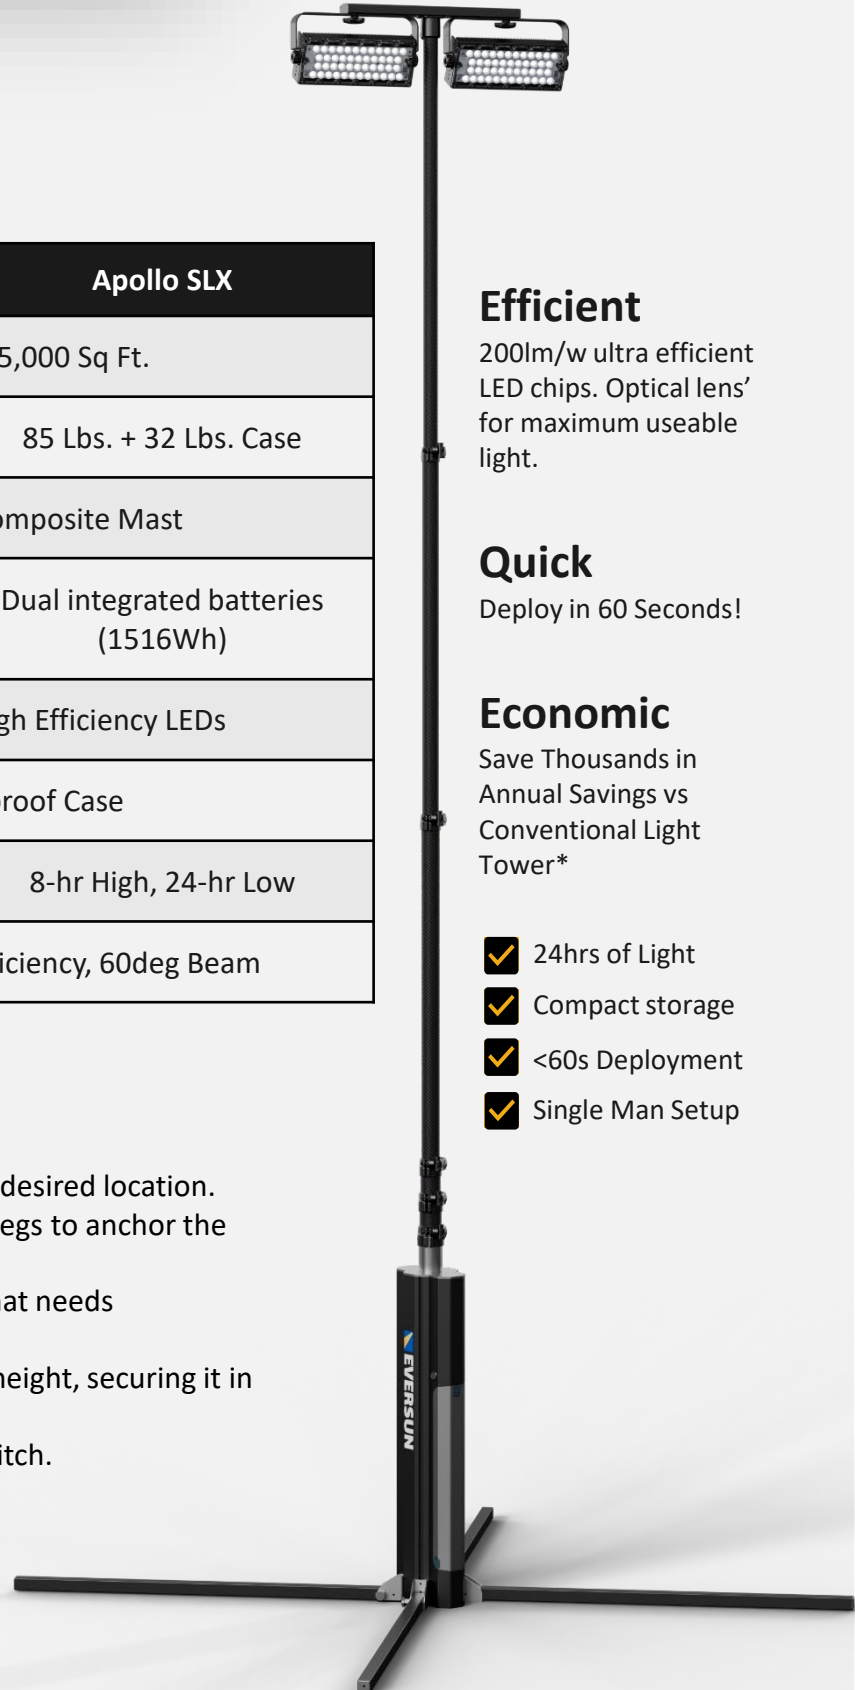

Apollo S eTower™

40,000 Lumen LED
Lamps

20' 6-Stage
Carbon Fiber
Telescopic Mast

Robust Modular
Frame

Lithium-Ion
Battery System

Quick Deploy
Quad-Pod Legs



Sports



Events



Utilities



Emergency &
Disaster





Rental



EVERSUN

Data Sheet

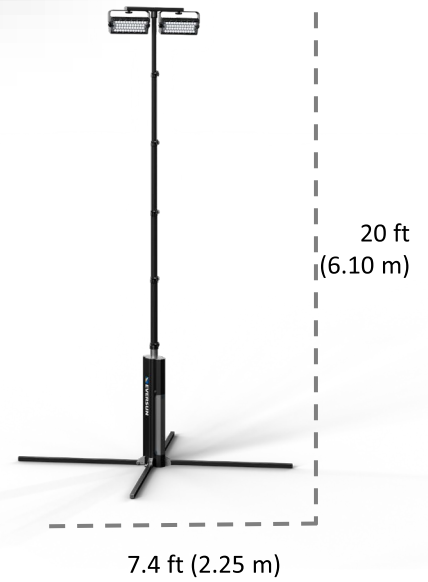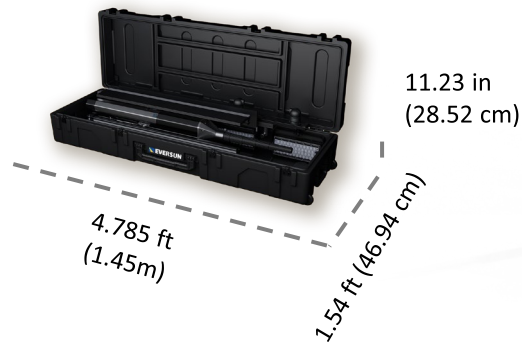

Basketball Court 120' x 62' Play Area

1 Apollo S @ 20 ft mast height with 2 - 120W LED fixtures

- Standard configuration 60 degree lens angle 30 degree tilt

30+ foot candles
20 foot candles
10 foot candles
5 foot candles

3 foot candles
2 foot candles
1 foot candles
<0.5 foot candles

