

L4A-DMDM-6-P



LDF4-50A SureFlex® Jumper with interface types 7-16 DIN Male and 7-16 DIN Male, 6 ft.

Product Classification

Product Series	LDF4-50A
Product Type	SureFlex® Premium, static PIM

General Specifications

Body Style, Connector A	Straight
Body Style, Connector B	Straight
Interface, Connector A	7-16 DIN Male
Interface, Connector B	7-16 DIN Male
Length	1.829 m 6.000 ft
Nominal Size	1/2 in
Specification Sheet Revision Level	B

Electrical Specifications


3rd Order IMD Static	-159.00 dBc -116.00 dBm
3rd Order IMD Static Test Method	Two +43 dBm carriers
DTF, Connector A	-34.00 dB
DTF, Connector B	-34.00 dB

Environmental Specifications

Immersion Test Method	Meets IEC 60529:2001, IP68 in mated condition
------------------------------	---

Jumper Assembly Sample Label

L4A-DMDM-6-P

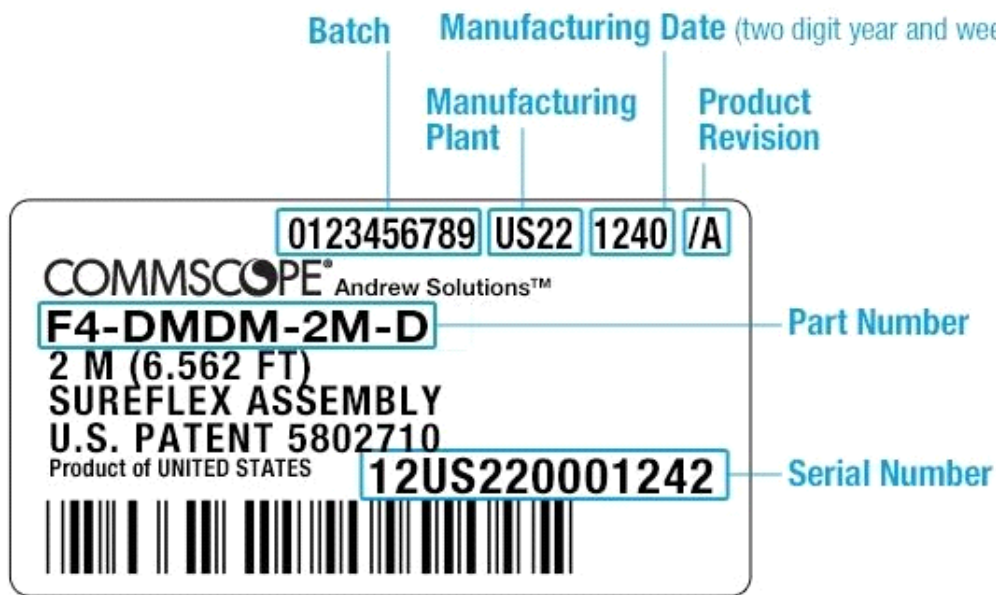

Return Loss/VSWR

Frequency Band	VSWR	Return Loss (dB)
698–960 MHz	1.06	30.00
1700–2200 MHz	1.06	30.00
2200–2700 MHz	1.11	26.00

Regulatory Compliance/Certifications

Agency

RoHS 2011/65/EU
China RoHS SJ/T 11364-2006
ISO 9001:2015

Classification

Compliant by Exemption
Above Maximum Concentration Value (MCV)
Designed, manufactured and/or distributed under this quality management system



Included Products

LDF4-50A — LDF4-50A, HELIAX® Low Density Foam Coaxial Cable, corrugated copper, 1/2 in, black PE jacket